

Vended **Galaxy™ Touch** Tumble Dryers

Huebsch's tumble dryers, featuring Galaxy™ Touch control, is specifically designed with fewer moving parts, so you'll face fewer maintenance issues over their lifespan.


- 5", full color, touch screen display on stack tumble dryers (7" display on single tumble dryers)
- Chrome door ring
- Lint trap blends in with front panel for a sleek, modern look
- Innovative galvanized cylinder design with stainless steel back
- Patented oval cylinder perforations prevent small metal objects from passing through and damaging the dryer's sweep sheets
- Axial Airflow provides the most concentrated and efficient drying possible to make dry times even faster, while saving you money



Galaxy™ Touch Control

The Galaxy™ Touch display is clear, easy to use, easy to understand directions with profitable cycle modifiers enhance your customers' experience and increase return on investment.

- User-friendly screens with operating instructions built in as part of the control
- 5 basic cycles (high, medium, low, delicate, no heat)
- Easy-to-understand cycle modifier prompts will encourage your customers to customize their dry
- Flexible pricing and additional revenue opportunities with customizable cycle modifiers, time-of-day pricing and lucky cycle options
- 30+ languages available
- On-screen timer so your customers know exactly how much time their cycle will take
- Flexible Payment Options – Coin, Card, Mobile, Cash

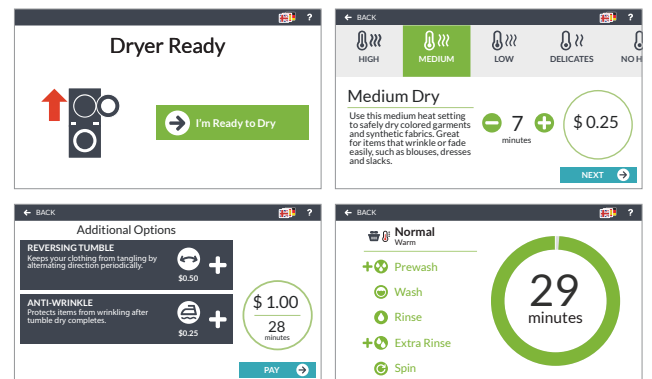

Vended **Tumble Dryers** Specifications

Models		HG030	HG035	HG055	HG050	HG075	HGT30	HGT45	
Control Options		Galaxy™ Touch	Galaxy™ Touch	Galaxy™ Touch	Galaxy™ Touch	Galaxy™ Touch	Galaxy™ Touch	Galaxy™ Touch	
Capacity – lb (kg)		30 (14)	35 (16)	55 (25)	50 (23)	75 (34)	30 (14) x 2	45 (20) x 2	
Overall Width – in (mm)		27.9 (709)	31.5 (800)	34.5 (876)	38.5 (978)	38.5 (978)	31.5 (800)	34.5 (875)	
Overall Depth – in (mm)		45.5 (1156)	45.5 (1156)	53.1 (1349)	46.8 (1189)	53.0 (1346)	42.8 (1087)	48.6 (1235)	
Overall Height – in (mm)		63.9 (1623)	63.9 (1623)	66.7 (1694)	77.3 (1963)	77.3 (1963)	76.3 (1938)	81.3 (2065)	
Cylinder Diameter – in (mm)		26.5 (673)	30 (762)	33 (838)	37.0 (940)	37.0 (940)	30.0 (762)	33.0 (838)	
Cylinder Depth – in (mm)		30.0 (762)	30.0 (762)	35.0 (889)	30.0 (762)	36.0 (914)	26.0 (660)	30.0 (762)	
Cylinder Volume – cu ft (liters)		9.6 (272)	12.3 (348)	17.3 (490)	18.7 (530)	22.4 (634)	10.6 (300)	14.8 (419)	
Reversing Cylinder		Standard	Standard	Standard	Standard	Standard	Standard	Standard	
Door Opening Size – in (mm)		22.7 (577)	22.7 (577)	26.9 (683)	26.9 (683)	26.9 (683)	22.6 (574)	26.9 (683)	
Heat Input Power		73,000 Btu/hr	90,000 Btu/hr	112,000 Btu/hr	122,000 Btu/hr	150,000 Btu/hr	73,000 x 2 Btu/hr	95,000 x 2 Btu/hr	
Gas Connections - in (npt)		0.5	0.5	0.5	0.5	0.5	0.5	0.5	
Air Outlet - in (mm)		6 (152)	8 (200)	8 (200)	8 (203)	8 (200)	1 x 8 (200) oval	1 x 10 (250) oval	
Motor - HP	Fan	0.3	1 (0.75)	0.5	0.5	0.5	0.3	0.5	
	Cylinder	0.3	0.3	0.5	0.5	0.5	0.3	0.5	
Airflow - cfm		500	600	700	700	800	2 x 400	2 x 600	
Electrical Specs - amps	B	100-120V/50/60/1	10	10	12	9	12	16	–
	X	200-240V/50/60/1/3	6	6	7	6	7	9	12
Shipping Dimensions Approx. – in (mm)	Width	30.0 (762)	33.0 (838)	35.5 (902)	41.5 (1054)	41.5 (1054)	32.5 (826)	35.5 (902)	
	Depth	49.0 (1245)	49.0 (1245)	57 (1448)	50.0 (1270)	56.0 (1422)	47.0 (1194)	54.0 (1372)	
	Height	67.6 (1717)	67.6 (1717)	70.5 (1791)	81.0 (2057)	81.0 (2057)	79.9 (2029)	84.9 (2156)	
Net Weight – lb (kg)		320 (145)	340 (154)	430 (195)	660 (299)	690 (313)	570 (259)	710 (322)	
Shipping Weight – lb (kg)		340 (154)	360 (163)	470 (213)	710 (322)	740 (336)	600 (272)	750 (340)	
Agency Approvals		KTL/KGS/IEC/TISI	KTL/KGS/IEC/TISI	KTL/KGS/IEC/TISI	KTL/KGS/IEC/TISI	KTL/KGS/IEC/TISI	KTL/KGS/IEC/TISI	KTL/KGS/IEC/TISI	

Tumble dryer models are made to suit a variety of electrical service characteristics. See your Huebsch distributor for specifications. For further details on installation, refer to Installation, Operation and Maintenance instructions supplied with the tumble dryer. Amperage ratings available in Installation Manual.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.